

Head Office:

F/S14, Bayint Naung Road,  
Shwe Sabi Yeik Mon,  
Kamayut Township,  
Yangon, Myanmar  
Hotline :09420077507/09780002400

Factory:


Blk-94 (A+B), 42nd Quarter,  
Kha Yae Pin Street,  
Industrial Estate,  
Shwe Pyi Tha Township,  
Yangon, Myanmar

## N50Z/ZL (55D26)



## Dimensions (mm)

Length (L)	Width (W)	Height (H)	T. Height (TH)
256 ± 2	171 ± 2	201 ± 2	225 ± 2

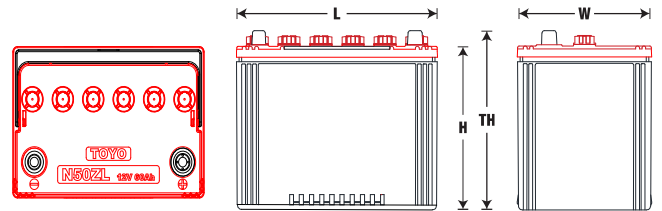


## Physical Specification

Nominal Voltage	12 V	
Nominal Capacity (20 Hour Rate)	60 Ah	
Dimension	Length	256 ±2 mm
	Width	171 ±2 mm
	Container Height	201 ±2 mm
	Total Height	225 ±2 mm
Weight (approximate)	9.7 Kg	
Acid	1.25 g/cm <sup>3</sup> (25°C)	
Acid Vol	4.6Liter	
Terminal Design	T2	
Cell Layout	0/1	
Hold Down	Not Available	
Container	PP - Natural	
Cover	PP - Red	
Handle	PP - Red	


## Electrical Specification

Rated Capacity (20 Hour Rate @ 3.00 A)	60 Ah
Reserve Capacity	89 Min
Cold Cranking Performance @ -18°C (0°F)	290 A

## Discharged Characteristics @ 25°C (70°F)

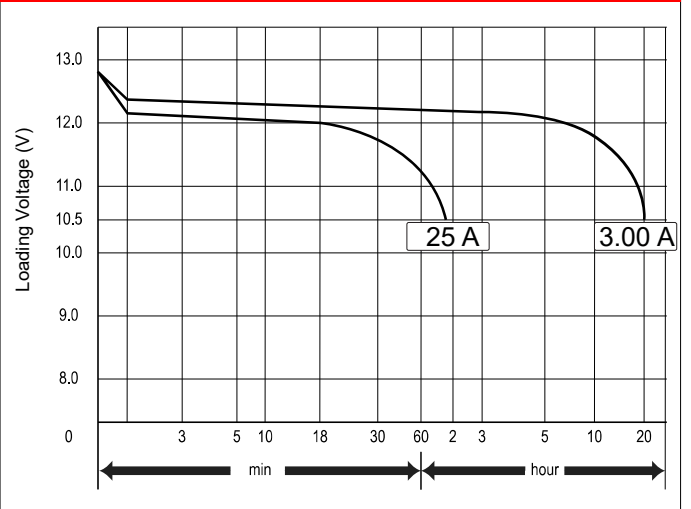

## Discharged Characteristics @ -18°C (0°F)

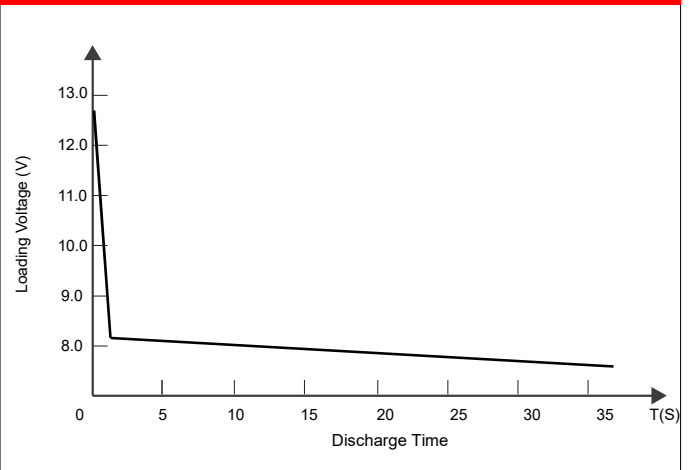

## Terminal Design

## Cell Layout

Type	ØD	
	Positive	Negative
T2	19.5 <sup>+0.3</sup>	17.9 <sup>+0.3</sup>

The terminal design diagrams show the T2 terminals with dimensions: Positive terminal width is 19.5 mm and height is 17.0 mm. Negative terminal width is 17.9 mm and height is 17.0 mm. The tapered top of the terminals is 1/8 inch. The cell layout diagrams show the arrangement of cells, with the positive terminal on the left and the negative terminal on the right.