

Head Office:  
F/S14, Bayint Naung Road,  
Shwe Sabi Yeik Mon,  
Kamayut Township,  
Yangon, Myanmar  
Hotline :09420077507/09780002400

Factory:  
Blk-94 (A+B), 42nd Quarter,  
Kha Yae Pin Street,  
Industrial Estate,  
Shwe Pyi Tha Township,  
Yangon, Myanmar

## 46B24L/R (NS60/L)




## Physical Specification

Nominal Voltage	12 V	
Nominal Capacity (20 Hour Rate)	45 Ah	
Dimension	Length	235 ±2 mm
	Width	126 ±2 mm
	Container Height	201 ±2 mm
	Total Height	221 ±2 mm
Weight (approximate)	12.5 Kg	
Terminal Design	T1	
Cell Layout	0/1	
Hold Down	Choice of Yes/No	
Case	PP - Black	
Cover	PP - Black	
Handle	PP - Red	

## Terminal Design


Type	ØD	
	Positive	Negative
T1	14.7 <sup>0</sup> <sub>-0.3</sub>	13.0 <sup>0</sup> <sub>-0.3</sub>

## Cell Layout



## Dimensions (mm)


Length (L)	Width (W)	Height (H)	T. Height (TH)
235 ±2	126 ±2	201 ±2	221 ±2

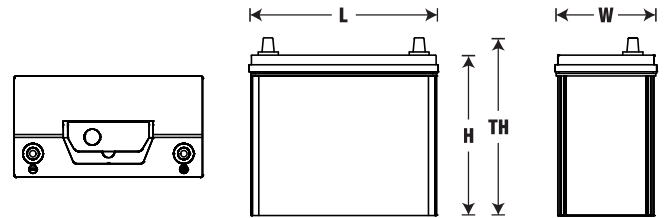

## Electrical Specification

Rated Capacity (20 Hour Rate @ 2.25 A)	45 Ah
Reserve Capacity	56 Min
Cold Cranking Performance @ -18°C (0°F)	330 A

## Discharged Characteristics @ 25°C (70°F)

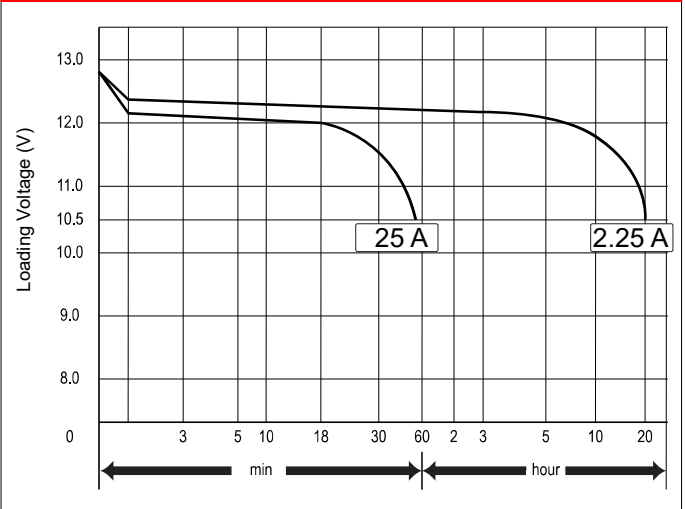

## Discharged Characteristics @ -18°C (0°F)

